




H32BASIC

Suited for smaller service facilities



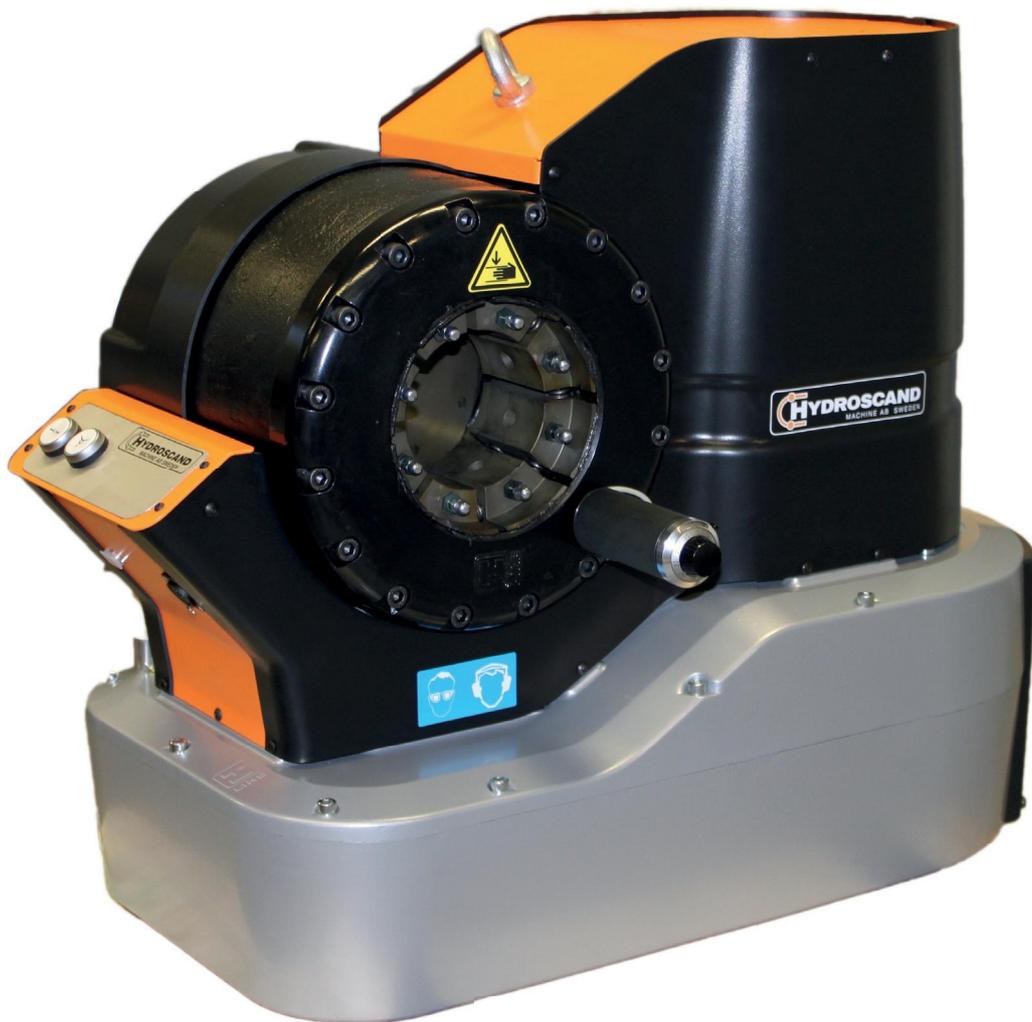

DIMENSIONS

Widht/ Depth/ Height 610x430x570 mm
 Weight 173 kg (without oil)

DESIGNATION

H32BASIC **PART NUMBER:** 9028-00-17

DIES:

	PART NUMBER:
H32-10	9060-32-10
H32-12	9060-32-12
H32-14	9060-32-14
H32-16	9060-32-16
H32-19	9060-32-19
H32-22	9060-32-22
H32-26	9060-32-26
H32-30	9060-32-30
H32-34	9060-32-34
H32-39	9060-32-39
H32-45	9060-32-45
H32-51	9060-32-51
H32-57	9060-32-57
H32-63	9060-32-63
H32-69	9060-32-69
H32-74	9060-32-74
H32-78	9060-32-78

TECHNICAL DATA

Crimping range in mm 10 - 87 mm
 Crimping range in inch 0,39 - 3,42
 Crimping force in metric tons 200
 Crimping force in kN 2000
 Maximum hose size in inch 2"
 Die Set H32
 Maximum travel of dies in mm 33 mm
 Master die Diam. /Length in mm 99 / 80
 Master die Diam. /Length in inches 3,90 / 3,15
 Machine control Manual
 Motor size in kW 1 phase / 3 phase
 3 kW / 4 kW
 Colour Black / Orange

Kungsvägen 22, SE-783 35 Säter, Sweden
 Phone: +46-(0)225-573 30 Fax: +46-(0)225-501 08
 info@hydroscand-machine.se www.hydroscand-machine.se

