




## H24DC

Versatile field performance



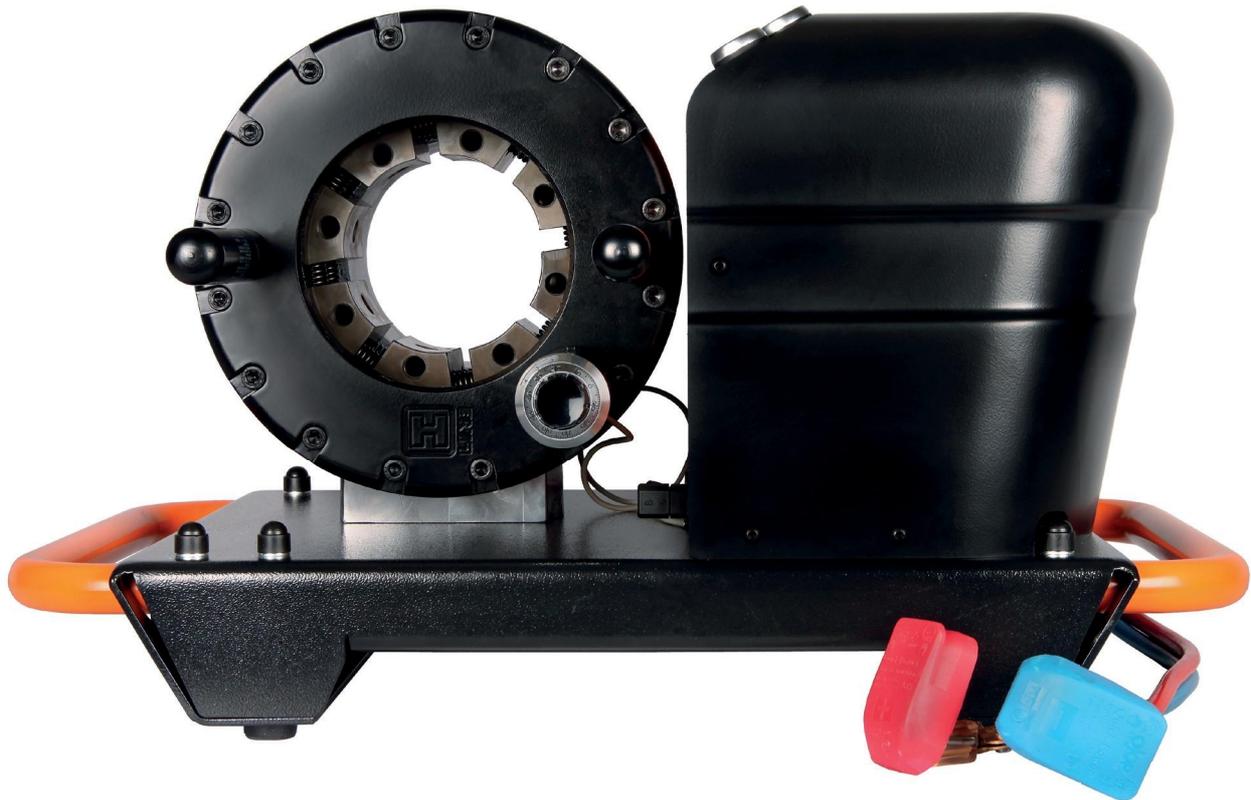

**DIMENSIONS**

Widht/ Depth/ Height ..... 520x450x370 mm  
 Weight ..... 84 kg

**DESIGNATION**

H24DC 12V ..... 9028-00-12  
 H24DC 24V ..... 9028-00-13

**DIES:**

	<b>PART NUMBER:</b>
H20-10.....	9063-20-10
H20-12.....	9063-20-12
H20-14.....	9063-20-14
H20-16.....	9063-20-16
H20-19.....	9063-20-19
H20-23.....	9063-20-23
H20-27.....	9063-20-27
H20-31.....	9063-20-31
H20-36.....	9063-20-36
H20-41.....	9063-20-41
H20-47.....	9063-20-47
H20-54.....	9063-20-54

**TECHNICAL DATA**

Crimping range in mm ..... 10 - 61 mm  
 Crimping range in inch ..... 0,39 - 2,40  
 Crimping force in metric tons ..... 140  
 Crimping force in kN ..... 1400  
 Maximum hose size in inch..... 1 1/2"  
 Die Set ..... H24  
 Maximum travel of dies in mm ..... 25 mm  
 Master die Diam. /Length in mm..... 84 / 80  
 Master die Diam. /Length in inches ..... 3,31 / 3,15  
 Machine control..... Micrometer Screw  
 Motor size in kW 12V/24V..... 1,6 kW / 2,2 kW  
 Motor size in HP 12V/24V ..... 2,1 / 3,0  
 Colour ..... Black / Orange

Kungsvägen 22, SE-783 35 Säter, Sweden  
 Phone: +46-(0)225-573 30 Fax: +46-(0)225-501 08  
 info@hydroscand-machine.se www.hydroscand-machine.se

