




H24HP

Versatile field performance



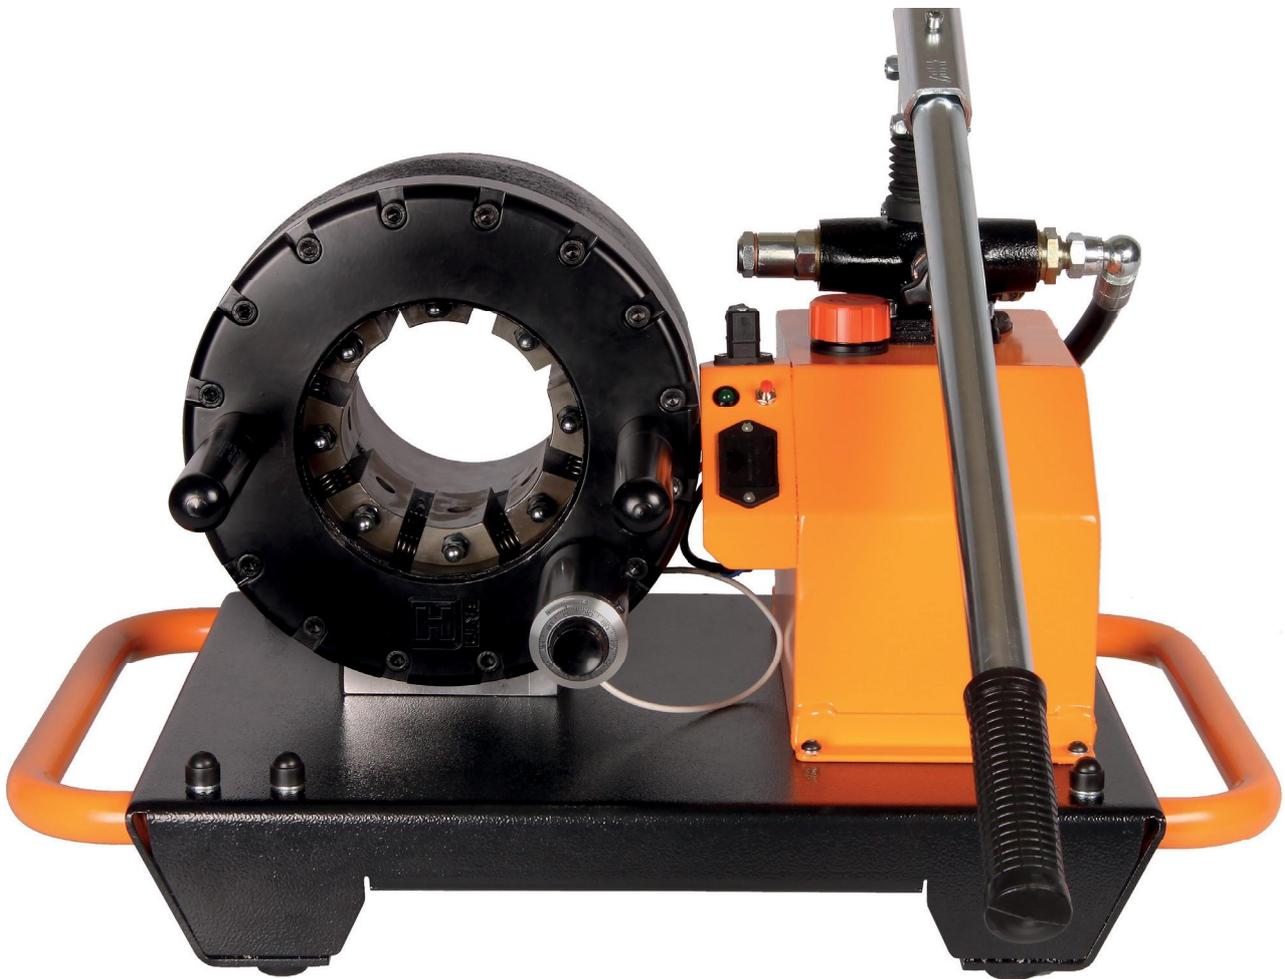

DIMENSIONS

Widht/ Depth/ Height520x400x370 mm
 Weight 75 kg

DESIGNATION

H24HP..... 9028-00-10

DIES:

	PART NUMBER:
H20-10.....	9063-20-10
H20-12.....	9063-20-12
H20-14.....	9063-20-14
H20-16.....	9063-20-16
H20-19.....	9063-20-19
H20-23.....	9063-20-23
H20-27.....	9063-20-27
H20-31.....	9063-20-31
H20-36.....	9063-20-36
H20-41.....	9063-20-41
H20-47.....	9063-20-47
H20-54.....	9063-20-54

TECHNICAL DATA

Crimping range in mm	10 - 61 mm
Crimping range in inch	0,39 - 2,40
Crimping force in metric tons.....	140
Crimping force in kN	1400
Maximum hose size in inch	1 1/2"
Die Set	H24
Maximum travel of dies in mm.....	25 mm
Master die Diam. /Length in mm.....	84 / 80
Master die Diam. /Length in inches.....	3,31 / 3,15
Machine control	Manual
Motor size in kW 1 phase / 3 phase.....
.....250 Bar Handpump
Motor size in HP 1 phase / 3 phase.....
.....250 Bar Handpump
Colour.....	Black / Orange

Kungsvägen 22, SE-783 35 Säter, Sweden
 Phone: +46-(0)225-573 30 Fax: +46-(0)225-501 08
 info@hydroscand-machine.se www.hydroscand-machine.se

