




H32DC

Versatile field performance



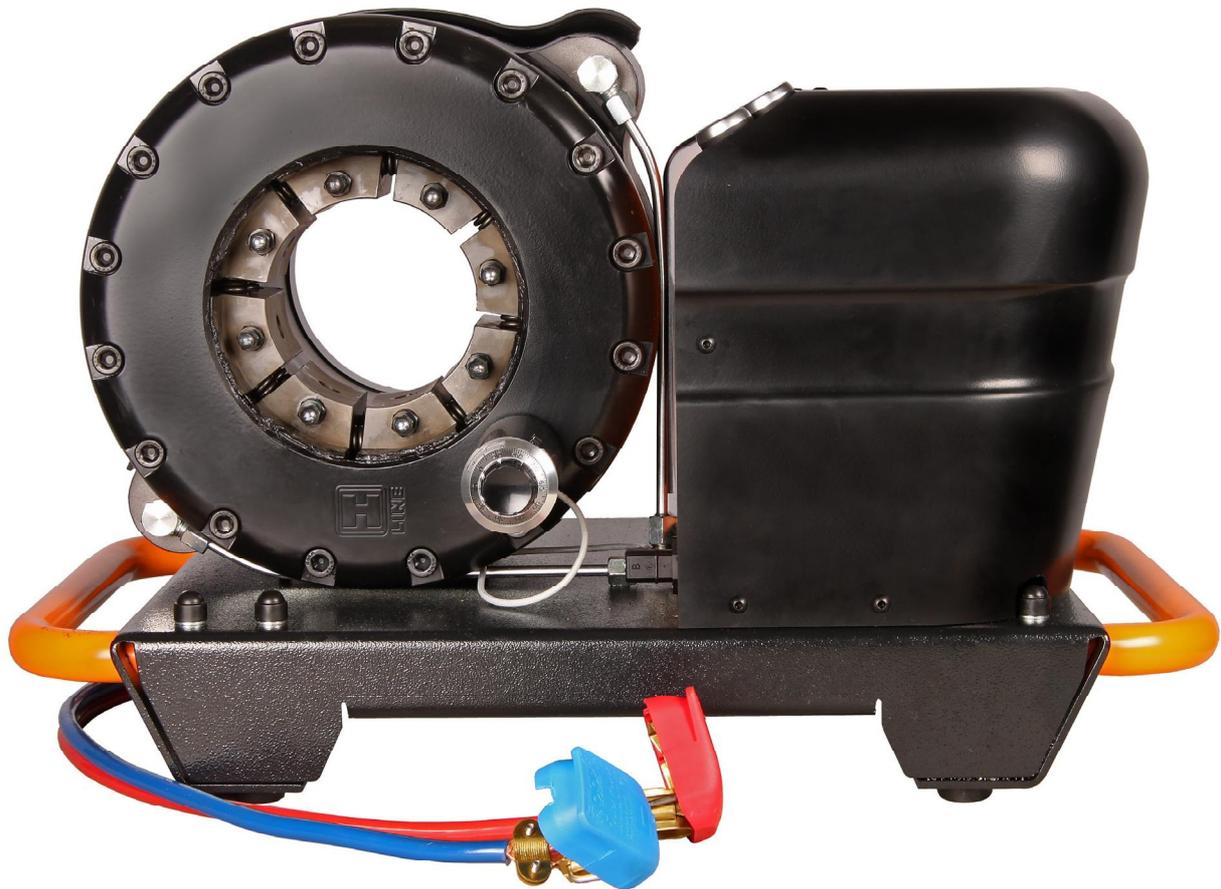

DIMENSIONS

Widht/ Depth/ Height540x420x400 mm
 Weight 115 kg

DESIGNATION

H32DC 12V 9028-00-15
 H32DC 24V 9028-00-16

DIES:

	PART NUMBER:
H32-10	9060-32-10
H32-12	9060-32-12
H32-14	9060-32-14
H32-16	9060-32-16
H32-19	9060-32-19
H32-22	9060-32-22
H32-26	9060-32-26
H32-30	9060-32-30
H32-34	9060-32-34
H32-39	9060-32-39
H32-45	9060-32-45
H32-51	9060-32-51
H32-57	9060-32-57
H32-63	9060-32-63
H32-69	9060-32-69
H32-74	9060-32-74
H32-78	9060-32-78

TECHNICAL DATA

Crimping range in mm 10 - 87 mm
 Crimping range in inch 0,39 - 3,42
 Crimping force in metric tons 200
 Crimping force in kN2000
 Maximum hose size in inch..... 2"
 Die Set H32
 Maximum travel of dies in mm 33 mm
 Master die Diam. /Length in mm 99 / 80
 Master die Diam. /Length in inches 3,31 / 3,15
 Machine control..... Micrometer Screw
 Motor size in kW 12V/24V.1,6 kW / 2,2 kW
 Motor size in HP 12V/24V2,1 / 3,0
 Colour Black / Orange

Kungsvägen 22, SE-783 35 Säter, Sweden
 Phone: +46-(0)225-573 30 Fax: +46-(0)225-501 08
 info@hydroscand-machine.se www.hydroscand-machine.se

